

WB-2miniD-000

4x Frequency Mini Breakout Box



Key Features

- Breakout Box 4x Frequency Input → Binder 712 8PM
- Compact and lightweight design


Options:

- All connectors and cable length can be modified on customer request

Technical specifications

Electrical characteristics		Mechanical characteristics	
Frequency channels	4	Housing material	Aluminum
Environmental data		Weight (cable included)	g 55
Protection class	IP 67	Dimensions	mm 45x15x12
Ambient operating range	°C 0 to +75	Analog line	Binder 712 8PM
Humidity	% 5 to 95	Type	PUR
		Length	mm 850
		Wire cross section	8x AWG26
		Frequency input	Binder 715 4PF built in
Ordering information			
WB-2miniD-000			

Dimensions

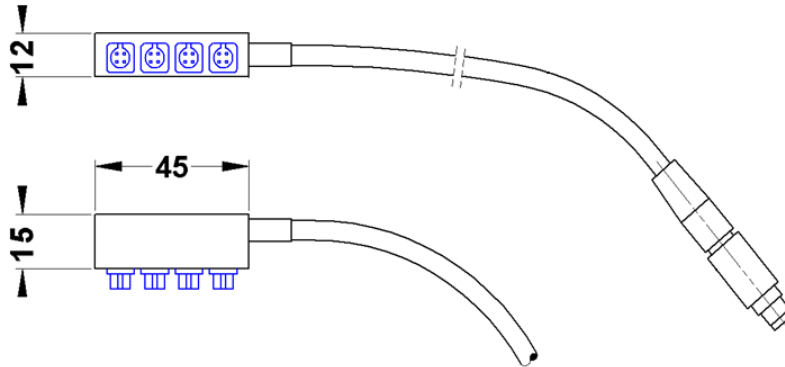


Connector layout

Connector type

Analog line, Binder 702, 8PM


Pin	Name	Description	Color
1	Vcc	5V sensor supply	white
2	AGND	Analog ground	brown
3	n.c.	not connected	-
4	+12V	12V sensor supply	yellow
5	FREQ1	Frequency input 1	grey
6	FREQ2	Frequency input 2	pink
7	FREQ3	Frequency input 3	blue
8	FREQ4	Frequency input 4	red



front view

Frequency input, Binder 719, 4PF

Pin	Name	Description
1	DGND	Analog ground
2	Vcc	5V sensor supply
3	Signal	Signal input
4	+12V	12V sensor supply



front view